

NASHUA® 357
Premium Grade Duct Tape


APPLICATIONS

- Heating, air conditioning, ventilating, and refrigeration applications.
- Asbestos removal applications.
- Sealing of seams and joints in metal air handling systems.
- Sand and media blasting applications.
- Manufacture of flexible duct equipped with metal collars.
- Bonding, protecting, holding, repairing, and patching.

FEATURES & BENEFITS

- Superior tensile strength.
- Clean release -- resists delamination.
- Conforms to a wide variety of surfaces.
- Outstanding performance over a wide temperature range.
- Tears straight, hangs straight, and resists curling.
- Preferred tape of professional contractors who demand a consistent, trouble-free product.
- Tested in accordance with UL 723.

CONSTRUCTION

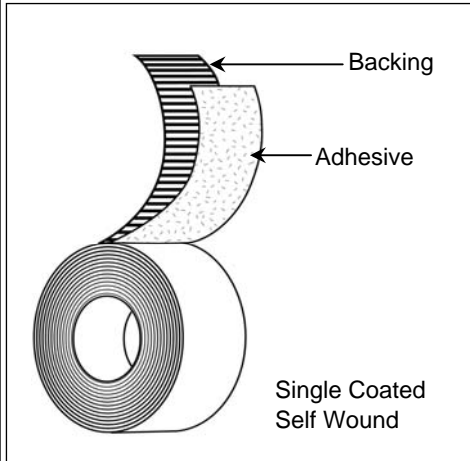

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Coated Cloth

Adhesive:

- Rubber

Colors:

- Black, Olive Drab, Red, Silver, White

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	13 mils	330.20 μ	ASTM D 1000
Adhesion to Steel	55 oz./in.	6.02 N/cm	PSTC-1
Adhesion to Backing	47 oz./in.	5.14 N/cm	PSTC-1
Tensile Strength	45 lb./in.	78.81 N/cm	ASTM D 1000
Unwind Force	56 oz./in.	6.13 N/cm	ASTM D 1000
Maximum Performance Temperature	200 F		
Flame Spread	15		
Smoke Developed	20		
Elongation	7.5%		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at COVALENCE ADHESIVES, LLC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Covalence's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which COVALENCE ADHESIVES assumes any legal responsibility.