


1568CW

METAL BUILDING FACING TAPE

VentureTape® 1568CW is a triple ply laminate of white polypropylene film/scrim/metallized polyester (PET) coated with a special cold weather acrylic pressure sensitive adhesive. Designed for use as a closure system and vapor seal on Alpha Associates VR-R Plus metal building facings, VentureTape 1568CW has superior resistance to mold, moisture, humidity, and extreme environmental conditions.

Product Construction

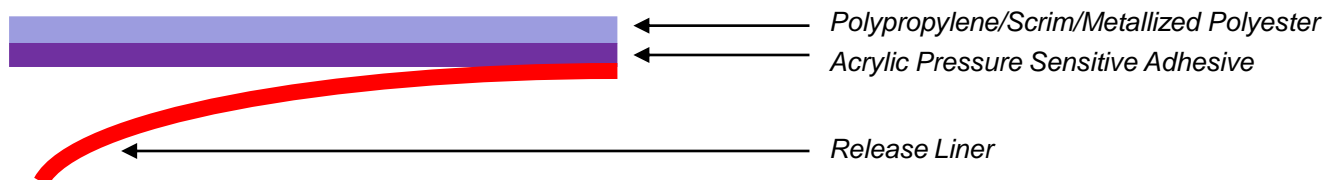

Features & Benefits

- High performance tape is specifically designed for use as a vapor seal on Alpha Associates VR-R Plus metal building facings
- Bonds and seals extremely well at low temperatures
- High performance acrylic adhesive performs well over a wide temperature range
- Also excels in high heat and humidity conditions
- In stock product available for immediate delivery

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness ^Ω	8.6 mils	0.22 mm	PSTC-133
Peel Adhesion ^Δ	50 oz/in	13.9 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	30 lb/in	135.6 N/25 mm	PSTC-131
Elongation	5 %	5 %	PSTC-131
Service Temperature	-40 to 220 °F	-40 to 104 °C	
WVTR	0.02 Perm		

^Ω - excluding liner

^Δ - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Available in white
- Contact for standard roll sizes

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

VentureTape®

GTA - NHT, Inc.
Venture Tape
30 Commerce Rd., Rockland, MA 02370
Tel 781-331-5900; Fax 781-871-0065
800-343-1076 (U.S.A.), 800-544-1024 (Canada)
Toll Free Fax 877-264-5490
www.venturetape.com

GTA
TAPES & ADHESIVES
a 3M Company